



Italkero

STRATOS
2010 - ENGLISH

Stratos

HOMOGENEOUS HEAT



features

- Elegant and functional design.
- **Customized style**, paint the front panel to match the walls.
- **Saving energy**, the warm air exits from the bottom side of heater and prevents the heat stratification.
- **Warms straightaway** after switch-on.
- **Real comfort**: temperature adjustment with Wireless digital chronothermostat.
- **Ecological**, triple-torch burner with low nox emissions.



heating flow on
the bottom



Stratos

FORCED DRAFT

Thanks to the **heating flow on the bottom** we avoid any stratification issues.


Design made in Italy to suit any decor.

installation



- Quick and easy installation thanks to the **floor standing** option.
- **Controls:** a simple and essential (1, standard) and thermostat wireless environment for maximum comfort (2, optional).
- Inbuilt humidifier for increased comfort.
- **Fine materials:** choice between aluminum and natural stones.

technical features

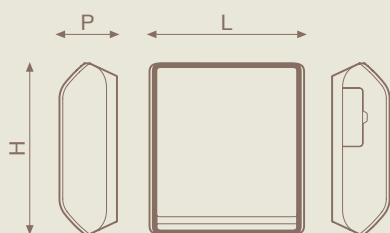

- Sealed chamber, total safety.
- **Double power, the most quietness.**
- Automatic power and forced convection for maximum efficiency and quiet operation.
- Intake and exhaust pipes (diam. 32 mm. or 54mm) independent and separable line up to 15 mts. flue.
- Aluminium heat exchanger.

Model	3.0	5.0	7.0	9.0	Digital chrono
Code aluminum	SR30M0 M0000	SR50M0 M0000	SR70M0 M0000	SR90M0 M0000	70000990 00
Code RAL9002	SR30M0 M0300	SR50M0 M0300	SR70M0 M0300	SR90M0 M0300	
Dimension L x H x P (mm)	535x585x200	685x585x200	835x585x200	985x585x200	
Heat input max/min (kW)	2,50 / 1,70	4,70 / 3,30	6,80 / 4,80	8,60 / 5,70	
Power max/min (kW)	2,32 / 1,58	4,34 / 3,05	6,25 / 4,41	7,74 / 5,13	
Consum. G20 (m³/h)	0,264	0,497	0,719	0,909	
G30/G31 (kg/h)	0,195	0,368	0,532	0,626	
Standard pipes L 50cm	Ø 32	Ø 32	Ø 54	Ø 54	

NOTE: THE PRICE INCLUDES THE LPG TRANSFORMATION AND THE STANDARD PIPES KIT.

NOTE: THE VALUES POWER CONSUMPTION FOR OPERATION OF THE EQUIPMENT AT MAXIMUM POWER (15 ° C).

Stratos

HOMOGENEOUS HEAT

A larger selection of Stratos accessories to suite all different requirements are available.
























Standard equipment

- Kit standard pipe intake and exhaust fumes L 50 cm (or 32 for mod. 3.0 - 5.0 and 54 for Ø mod. 7.0 - 9.0)
- Manual easy control
- Kit LPG conversion
- Humidifier tank

accessories

(are available for very specific additional accessories, contact commercial office)

	Model	Code	Description
		70000990 00	Wireless digital chronothermostat.
		70000700 00	Ø 32 - Elbow 90° aluminum, to link pipes together and output bridge.
		70000370 00	Ø 54 - Elbow 90° aluminum, to link pipes together.
		70000720 00	Ø 32 - 50 cm pipe aluminum, to link pipes together.
		70000390 00	Ø 54
		70000710 00	Ø 32 - 100 cm pipe aluminum, to link pipes together.
		70000380 00	Ø 54
		70000705 00	Ø 32 - Elbow 135° aluminum, to link pipes together (special installation).
		70000375 00	Ø 54
		70000755 00	Ø 54 - Elbow 90° diecast aluminum, to link pipes to output bridge. NOTE: do not use this advice as tubes connections.
		70000466	Ø 32 - Outlet for air intake and for exhaust (L 5cm).
		70000465 00	Ø 54 - Outlet for air intake and for exhaust (L 6cm).
	tutti	70000730 00	Ø 32 - Chimney.
	tutti	70000740 00	Ø 54 - Chimney.

	<i>Model</i>	<i>Code</i>	<i>Description</i>
	3.0	70000995 00	Ø 54 - Unique terminale for air intake and for exhaust and 2 diaphragms. (standard for mod. 7.0 and 9.0)
	5.0		
		70000365 00	Ø 32 e 54 - SDP grille for pipe with sunk outlet, single terminal.
		70000350 00	Ø 32 e 54 - GP Grille for single terminal.
		70000600 00	Ø 32 - GPu Grille for one terminal.
		70000610 00	Ø 54
		TP3206A5 00	Ø 32 - Special KIT, can be used to mount the pipes from inside the room.
		TP5410A5 00	Ø 54
		70000840	Ø 32 - Insulating for air casting on axhaust pipes (5 p. set. - L 100cm).
		70000850 00	Ø 54 - (4 p. set. - L 100cm).
		70000725	Ø 54 - Chimney weathering, soft rubber made (inclined roof).
		70000726 00	Ø 90 - (flat roof)
	3.0	70001435 00	Floor standing.
	5.0	70001440 00	
	7.0	70001445 00	
	9.0	70001450 00	
	3.0	TP32SP 00000	Ø 32 - Kit Special pipes, wall mount: 2 split end, tube L 100cm 2, 3 tube L 50cm, 3 90 ° bends, paper template, bridge fitting, screws, tap gas
	5.0		
	3.0	TP54SP 00000	Ø 54 - Special pipes kit, wall mount: 2 split end, 2 tubes 100cm L, 3 L 50cm tubes, three 90 ° corners, paper template, connection bridge, 2 diaphragms, O-rings, screws, tap gas
	5.0		
	7.0		
	9.0		
	3.0	70000665 00	Wall spacer.
	5.0	70000675 00	
	7.0	70000685 00	
	9.0	70000695 00	
	tutti	70000445 00	Ø 54 - Coaxial end section kit Ø110, roof installation (L 50cm).
		70006078 00	Ø 32 - Protective wooden walls KIT, pipes L 50cm (Ø 8,7cm).
		70006077 00	Ø 54 - (Ø 12,8cm).
		70000996 00	KIT gas tap connection. (3/8")
		70000347 00	Telephone switch KIT: 1 connection lead for 1 phone actuator (to be purchased separately).

Stratos

HOMOGENEOUS HEAT

Great comfort level thanks to wireless chronothermostat option.

Ecological, triple-torch burner with low nox emissions.





customized style

Large selection of natural and valuable material: aluminum, natural stone, crystal.

	Stratos 3.0	Stratos 5.0	Stratos 7.0	Stratos 9.0
Aluminum	SR30M0 M0000	SR50M0 M0000	SR70M0 M0000	SR90M0 M0000
White RAL 9002	SR30M0 M0300	SR50M0 M0300	SR70M0 M0300	SR90M0 M0300
RAL color option	000011	000012	000013	000014
Natural stone	SR30M0 M0800	SR50M0 M0800	SR70M0 M0800	SR90M0 M0800
Black crystal RAL9005	SR30M0 M0700	SR50M0 M0700	SR70M0 M0700	SR90M0 M0700
White crystal RAL9002	SR30M0 M0600	SR50M0 M0600	SR70M0 M0600	SR90M0 M0600
Metallic silver crystal	SR30M0 M0900	SR50M0 M0900	SR70M0 M0900	SR90M0 M0900



ITALKERO S.r.l. . via Lumumba 2 . Zona Ind. Torrazzi . 41122 Modena . Italy . Tel +39 59 2550711 . FAX +39 059 4900500 . www.italkero.it

NOTE: Due to ongoing product upgrading, aesthetic and dimensional features, technical details, fittings and accessories could undergo changes and are not binding.