



Model		200	300	500	800	1000	1500	2000	2500	3000	4000	5000	6000	8000	10000	
<b>Real storage capacity</b>	lit.	194	298	509	765	924	1468	2016	2664	2970	3839	5079	5950	7705	8715	
<b>d</b> Diameter without insulation	mm	450	550	650	800	800	950	1100	1250	1250	1400	1600	1600	1800	1900	
<b>D</b> Diameter with insulation flexible	mm	550	650	750	900	900	1050	1200	1350	1350	1500	1700	1700	1900	2000	
<b>D</b> Diameter with insulation rigid	mm	550	650	750	900	900	1050	1200	1350	1350	1500	1700	1700	1900	2000	
<b>HT</b> Total height	mm	1460	1490	1790	1800	2130	2390	2430	2500	2750	2800	2830	3335	3410	3470	
<b>L</b> Total length (horizontal version)	mm	1420	1460	1690	1860	2210	2320	2390	2460	2705	2800	2890	-	-	-	
<b>IS</b> Distance between feet	mm	840	840	1090	1010	1230	1510	1510	1470	1720	1720	1720	-	-	-	
<b>FL</b> Flange diameter	mm	220x300			300x380			350x430					400x480			
<b>K</b> Leaning height	mm	1550	1625	1960	2010	2310	2610	2710	2850	3060	3180	3300	3450	3550	3620	
<b>Unladen weight</b>	kg	58	68	88	120	160	205	260	310	360	410	510	635	910	975	

<b>Connections</b>																
<b>E</b> Cold water inlet		G1"¼	G1"¼	G1"¼	G1"½	G1"½	G2"	G2"	G2"½	G2"½	G3"	G3"	G3"	G3"	G3"	G3"
<b>U</b> Hot water outlet		G1"¼	G1"¼	G1"¼	G1"¼	G1"¼	G2"	G2"	G2"½	G2"½	G3"	G3"	G3"	G3"	G3"	G3"
<b>RC</b> Recirculation		G1"¼	G1"¼	G1"¼	G1"½	G1"½	G2"	G2"	G2"½	G2"½	G3"	G3"	G3"	G3"	G3"	G3"
<b>RE</b> Electrical resistance connection		G1"¼	G1"¼	G1"¼	G1"½	G1"½	G1"½	G1"½	G2"	G2"	G2"	G2"	G2"	G2"	G2"	G2"
<b>S</b> Discharge		G1"¼	G1"¼	G1"¼	G1"¼	G1"¼	G1"¼	G1"¼	G1"¼	G1"¼	G1"¼	G1"¼	G1"¼	G1"¼	G1"¼	G1"¼
<b>A</b> Magnesium anode connection		G1"¼	G1"¼	G1"¼	G1"½	G1"½	G1"½	G1"½	G1"½	G1"½	G1"½	G1"½	G1"½	G1"½	G1"½	G1"½
<b>So</b> Probe connection		G½"	G½"	G½"	G½"	G½"	G½"	G½"	G½"	G½"	G½"	G½"	G½"	G½"	G½"	G½"
<b>T</b> Thermometer/thermostat connection		G½"	G½"	G½"	G½"	G½"	G½"	G½"	G½"	G½"	G½"	G½"	G½"	G½"	G½"	G½"
<b>AE</b> Electronic anode connection		-	-	-	-	G½"	G½"	G½"	G½"	G½"	G½"	G½"	G½"	G½"	G½"	G½"
<b>AS</b> Ext. heat exchanger connection (QA)		G1"	G1"	G1"	G1"	G1"	-	-	-	-	-	-	-	-	-	-


<b>Tecnichal data</b>																
<b>PE</b> Max working pressure	bar	8	8	8	8	8	6	6	6	6	6	6	6	6	6	6
<b>TE</b> Peak temperature	°C	65	65	65	65	65	65	65	65	65	65	65	65	65	65	65
<b>TP</b> Max working temp.	°C	81	81	81	81	81	81	81	81	81	81	81	81	81	81	81

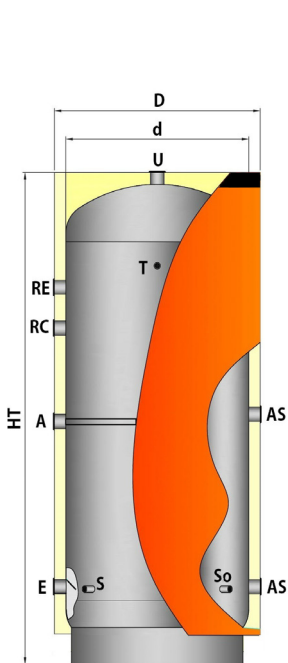

mod. QA

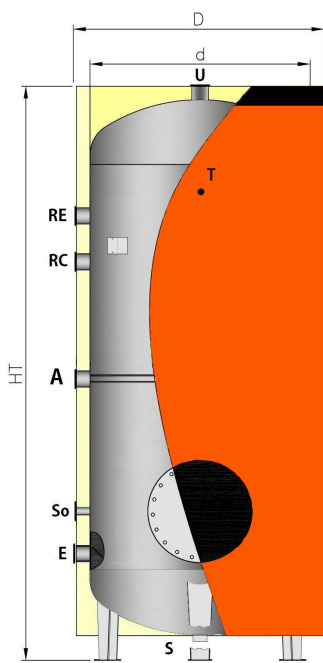

mod. QA/F

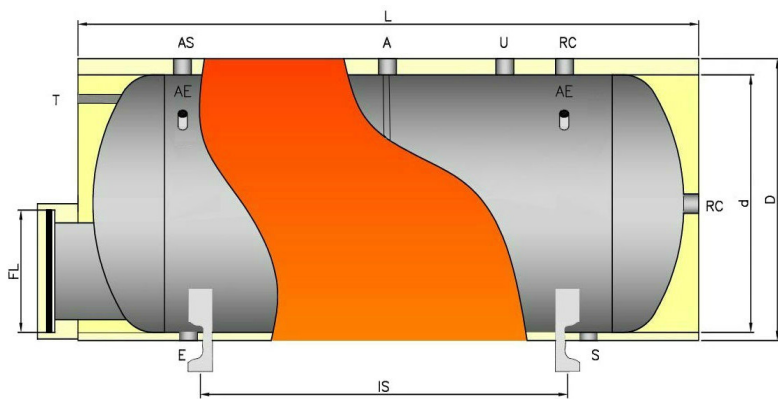

mod. QA/F Horiz.

