




F/F full port ball valve

F/F full port ball valve in hot forged brass.
Stem gland seal system.
Nickel plate finish.
Ends threaded to ISO 228 (DIN 259 BSP 2779).
Provided with steel lever PVC covered.

PN 30 (PN 25 for 2"1/2, 3" and 4").
Max Temperature 150°C.
Dimensions: from 1/4" up to 4".

Dimensional specifications:

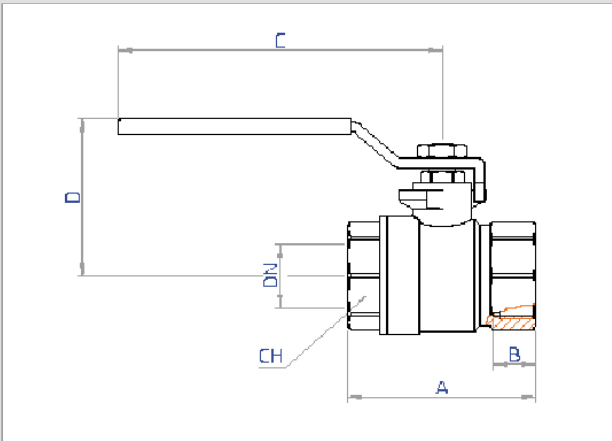

Specifications	Dimensions										
	1/4"	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"	2"1/2	3"	4"
A	44	44	50	58	68	80	93	110	134	151	180
B	12	12	12	13	15	17	19	21	23	25	29
C	77	77	100	100	120	120	157	157	230	230	230
D	41	41	46	49	62	67	85	92	120	128	142
CH	20,5	20,5	25	31	38,5	47,5	54	66,5	83	96	122
DN	10	10	15	20	25	32	40	50	63	74	94
Weight [g]	144	130	199	279	438	670	1150	1870	3000	4100	6500

Code 1/4": **00510**
Code 3/8": **01510**
Code 1/2": **02510**
Code 3/4": **03510**

Code 1": **04510**
Code 1"1/4: **05510**
Code 1"1/2: **06510**
Code 2": **07510**

Code 2"1/2: **08510**
Code 3": **09510**
Code 4": **0A510**

Correlated articles

SigilBlock



Patented tamperproof device

SigilBlock key



SigilBlock unlocking key