




M/F full port ball valve

M/F full port ball valve in hot forged brass.
Stem gland seal system.
Nickel plate finish.
Ends threaded to ISO 228 (DIN 259 BSP 2779).
Provided with steel lever PVC covered.

PN 30. Max Temperature 150°C.
Dimensions: from 1/4" up to 2".

Dimensional specifications:

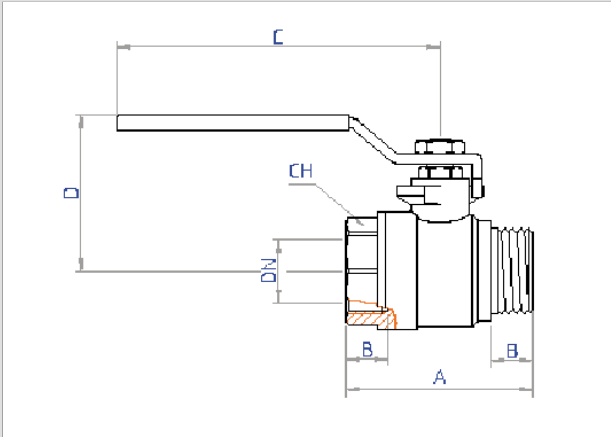

Specifications	Dimensions							
	1/4"	3/8"	1/2"	3/4"	1"	1"¼	1"½	2"
A	44	44	50	58	68	80	93	110
B	12	12	12	13	15	17	19	21
C	77	77	100	100	120	120	157	157
D	41	41	46	49	62	67	85	92
CH	20,5	20,5	25	31	38,5	47,5	54	66,5
DN	10	10	15	20	25	32	40	50
Weight [g]	128	126	192	269	439	660	910	1770

Code 1/4": **00560**
Code 3/8": **01560**
Code 1/2": **02560**
Code 3/4": **03560**

Code 1": **04560**
Code 1"1/4": **05560**
Code 1"1/2": **06560**
Code 2": **07560**