



Ball valve with built-in filter

F/F Ball valve with filter in hot forged brass.
 Stem double O-ring seal system.
 To fill the installation. Nickel plated.
 End threaded to ISO 228 (DIN 259 BSP 2779).
 Provided with steel T-handle.
 Stainless steel filtering mesh: 0,5 mm.
PN 16. Max Temperature 120°C.
Dimensions: 1/2", 3/4", 1".


Kvs values:

- **1/2": 5,3**
- **3/4": 5,6**
- **1": 12,0**



The stainless steel filter placed inside the ball can be easily removed, to be cleaned and inspected, while the valve is in closed position. The ball valve can be installed either with or without the filter (in this case the filter can be used for a limited time only, for example to clean the system).

Dimensional specifications:

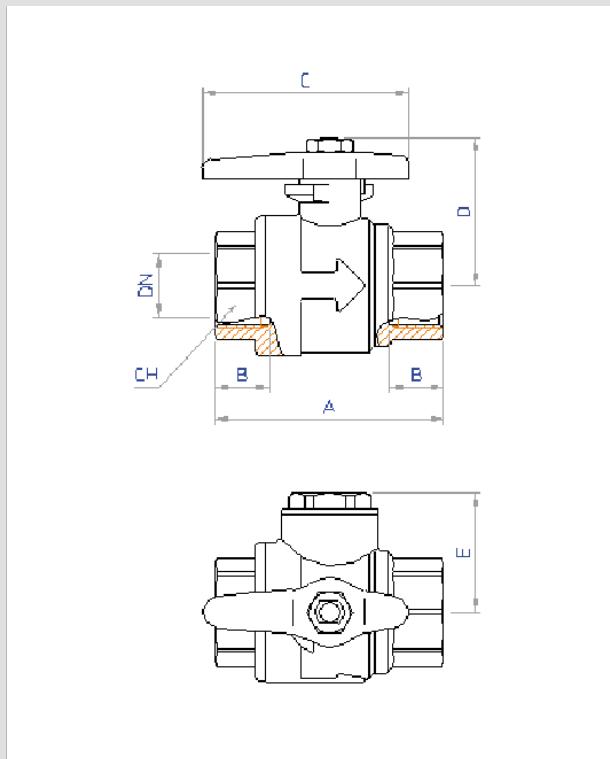

Specifications	Dimensions		
	1/2"	3/4"	1"
A	72	72	90
B	16	17	21
C	65	75	75
D	47	47	52
E	37	37	46,5
CH	32	32	40
DN	15	20	25
Weight [g]	540	488	785

Code **1/2": 02514F**
 Code **3/4": 03514F**
 Code **1": 04514F**