



Falò Visible flame view for outdoor use

Producing warmth.

MAIN FEATURES

TECHNICAL

Decorating visible flame creates a glamour atmosphere.
Radiant heating flow along the glass tube.
Smart functioning.
Automatic and manual models.
Structure: parts in inox steel and aluminium.
Anti tipping device, windproof and ionization control flame.

END USER

Anti scratch feet.
Wheels set (optional).
Belt for fastening any LPG cylinder.
Running by LPG and Natural Gas.
Designed product.

01_ Visible flame inside a glass tube




02_ Radio remote control, wheels set



03_ Remote-controlled model



RANGE, SIZE AND WEIGHT

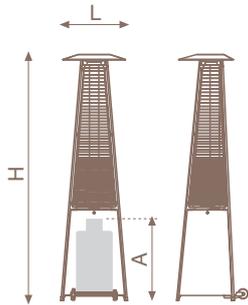

Model	manual	remote-controlled	u.m.
Hat (L)	648	648	mm
Base (L)	640	640	mm
Height (H)	2380	2380	mm
Height cylinder (A)	705	665	mm
Net weight	29	30	Kg
Gross weight	42	44	Kg



Equipped standard


- Anti-tipping device
- Rubber feet
- Manual model, various power levels
- Remote control model, 3 power levels

NOTE: FOR APPLIANCE OPERATING WITH NATURAL GAS, YOU MUST CHANGE THE 7TH FIGURE ON CODE, PUTTING A "M" (EX. FL12M0 M0100).

RANGE

	Model	Code	Description
	12m	FL12M0 L0100	Manual ign., structure cataphoresis + painted trasp.
	12t	FL12A0 L0100	Rem. control, structure cataphoresis + painted trasp.
	12m	FL12M0 L0000	Manual ignition, stainless structure.
	12t	FL12A0 L0000	Remote control, stainless structure.


INSTALLATION TYPOLOGIES

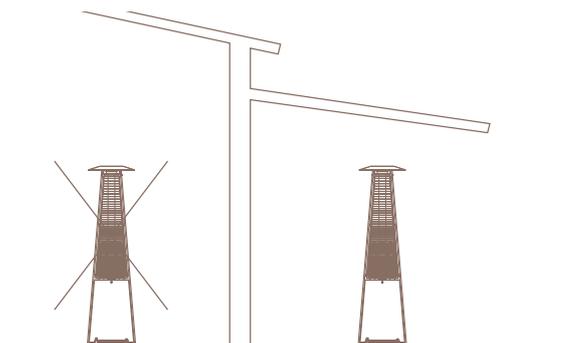

TECHNICAL DATA

Model	manual	remote-controlled	u.m.
Heat input nom.	12		kW
Heat input red. (Hs)			
- G20/25	6,4 - 6,0 (l 2L)		kW
- G30/31	4,5 - 5,2 (3B/P 50mbar)	5,2 - 6,2 (3B/P 50mbar)	kW
Consumption			
- G20	1,14		m ³ /h
- G25	1,33		m ³ /h
- G30	872		g/h
- G31	858		g/h
Gas category			
- G20/25	I 2H		
- G30/31	I 3+		
Pressure supply gas G20	20	20	mbar
Pressure supply gas G25	-	-	mbar
Pressure supply gas G30	28-30	28-30	mbar
Pressure supply gas G31	37	37	mbar
Nozzle diameter G20/25	2,50	3,30	mm
Nozzle diameter G30/31	1,65	2,10	mm
Power supply	nr. 1 x 1,5 (type AA)	nr. 2 x 1,5 (type torcia D)	V

CONTROLS




Remote-controlled models:

- Appliance On/Off.
- Electronic ignition.
- Flame Regulation:
 - max
 - med
 - min
- Remote control receiver.
- Red light: ignition.
- Green light: command reception.
- On/Off Beep and receive command.



Remote control:



- Appliance On/Off.
- Electronic ignition.
- Flame Regulation:
 - max
 - med
 - min




Manual models:

- Appliance On/Off.
- Piezo ignition.
- Flame Regulation:
 - min
 - max

ACCESSORIES

	Model	Code	Description
	12t	70001552 00	Remote control.
	12	70004570 00	Big hat.
	12	70004565 00	Wheels.
	12	70004571 00	Shelf Coffee (1 pc.): HPL with wood shelf bracket. (LxhxD = 647x10x228mm) NOTE: maximum 3 pieces.
	12	70004572 00	Peninsula shelf (1 pc.): Shelf with aluminum support. (LxhxD = 800x2x490mm) NOTE: maximum 3 pieces.
			
	12	000008	Painting of three poles of the structure. NOTE: specify the requested RAL color code.
DELUXE Color			

INSTALLATION

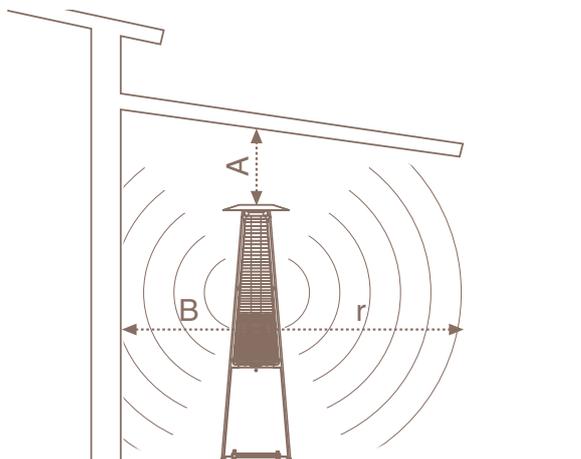

Model	manual	rem. controlled	u.m.
A min	0,5	0,5	m
B min	1	1	m
r max	3	3	m